



BREAKER CAM IDENTIFICATION



Fig. 1

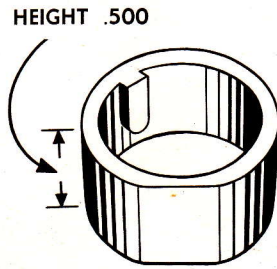


Fig. 2

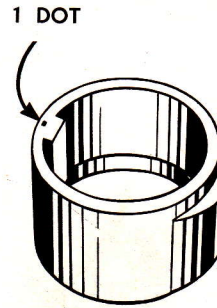


Fig. 3

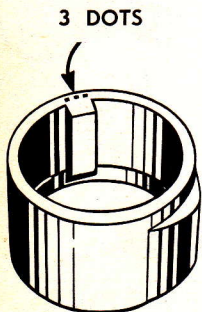


Fig. 4

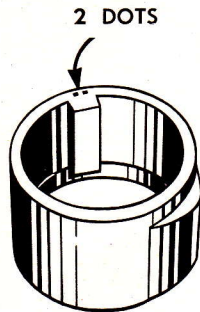


Fig. 5



Fig. 6

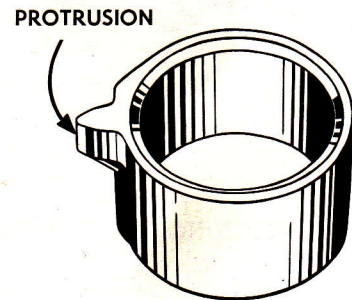


Fig. 7

PART NO.	IDENTIFICATION	FIG. NO.	USED ON MODELS
3105	Height .750—No Built-In Key. (Has Slot)	1	700-A, and A & B-1100
5105	Height .500	2	VS-200, A-300, VS-300, VS-400, 500, 650, B-700, C-700, D-700, D-700-1000, VS-700, VS-750, 800, VS-800, 900, 900-1000, C-1100, D-1100, 1200, 1200-1000
5594	Height .5625 One dot on end of Cam	3	A-200, AVS-200, VS-200-1000 A-400, AVS-400, VS-400-1000
5703	Height .5625 Three dots on end of Cam	4	D-700-2000, 900-2000, 1200-2000
5707	Height .5625 Two dots on end of Cam	5	100-1000, VS-100-1000, A-2100-1000, VS-2100-1000, 3100, VS-3100
10316	Height .5625—Ridge	6	100, VS-100, A-2100, VS-2100
16316	Height .6875—Protrusion	7	1600, 2500,

NOTE: These are correct to date and are applicable to new models until revised.